


Power Combiner Units

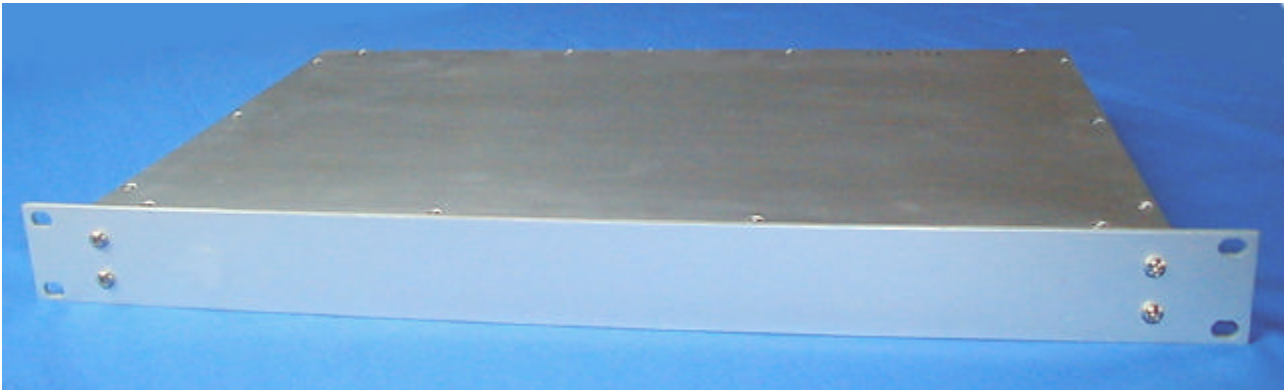

VHF bands

Low intermodulation

N transmitters to one antenna

High Isolation, Low insertion loss


To be used when more than one transmitter can utilize one antenna and cable installation. These units can be used with duplex filters to form multi channel systems on a single antenna



SPECIFICATIONS For Power Combiner Unit BWC3

Model No.:	2026	
Number of inputs:	3	
Frequency range:	140 - 180 MHz	
Insertion loss total:	-5.2 dB	
Bandwidth of input:	$\pm 2.5\%$ (adjustable)	
Power Rating each input:	100 Watts	
SWR input/output (50 Ω):	<1.25:1	
Isolation	-Input to input:	>40dB
Connectors:	-RF input/output	N,BNC,TNC or UHF sockets
Dimensions:	-With:	483mm (19")
	-Depth:	275mm (10.8")
	-Height:	89mm (3.5"), 2unit
Temperature	-Operating	0 to 60°C
	-Storage	-20 to 90°C

21.10.2004

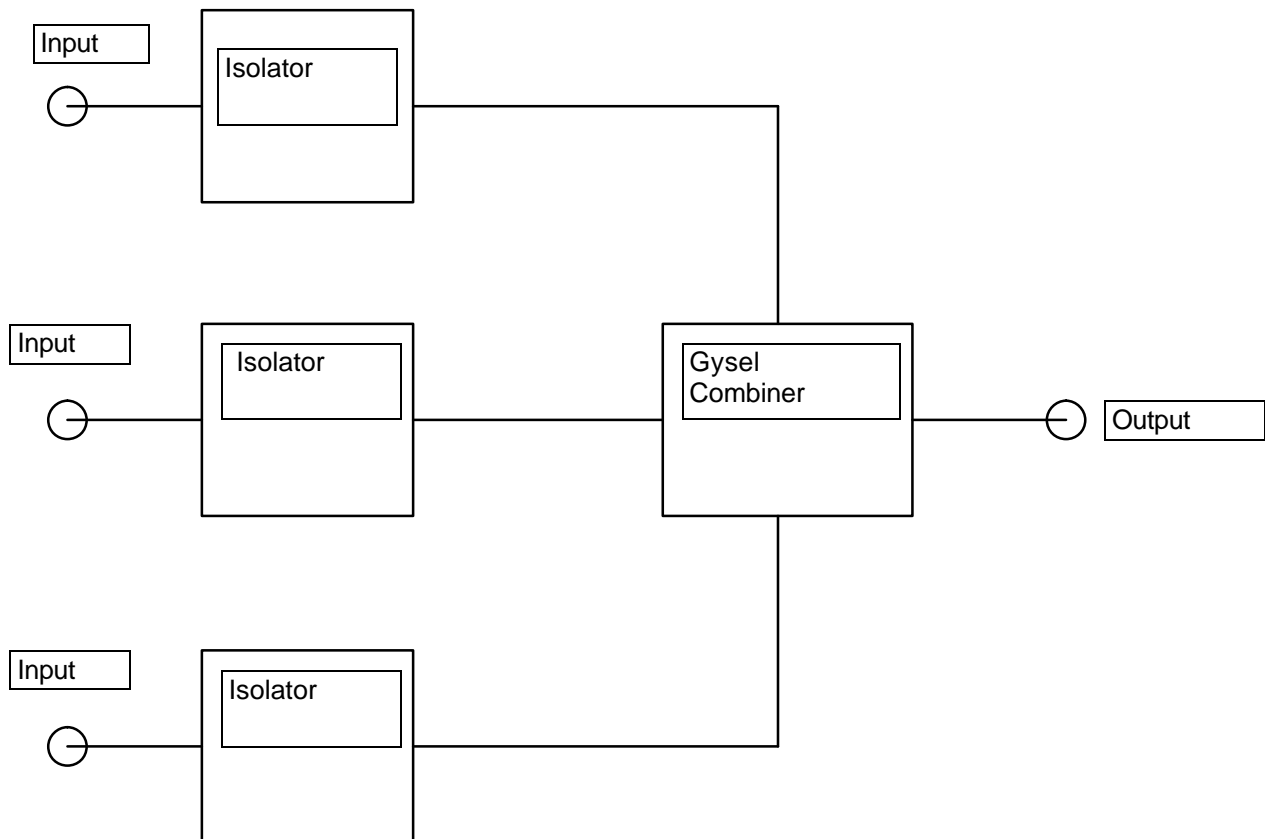

Comm-connect reserve the rights to amend prices and specifications without prior notice.

COMM-connect
Sigerslevoestervej 11
DK-3600 Frederikssund
Denmark

Phone: +45 48 28 82 82

Fax.: +45 48 28 82 66

E-mail: sales@comm-connect.com

WEB: <http://www.comm-connect.com>

