


VHF True RMS Power Probe

Type 3016

The VHF True RMS Probe is a frequency compensated power probe capable of measuring power even in a multiple carrier installation. Regardless of physical waveform, the probe will measure the True RMS power of the signal. When used together with our Broadcast Power Monitor type 3024, you can add Web and SNMP capabilities to your mast site installation

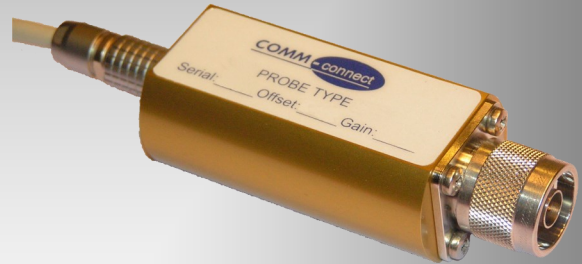


VHF True RMS Power Probe, type 3016 Specifications:

Frequency range:	50 MHz to 250 MHz
Power range:	-29 dBm to +15 dBm
Dynamic range:	> 50 dB
Coupling flatness:	± 0.25 dB
Absolute accuracy:	± 0.1 dB
SWR input:	< 1.2 : 1
Peak Power range:	+29 dBm
Temperature range:	+5° C to +50° C
Connector:	LEMO / N Male
Size:	90 x 35.5 x 26mm
Weight:	155g

Applications:

- Single carrier
- Multi carrier
- Any waveform detector
- VHF Band I, II and III
- RMS, Average and Peak sync modes
- Frequency compensated

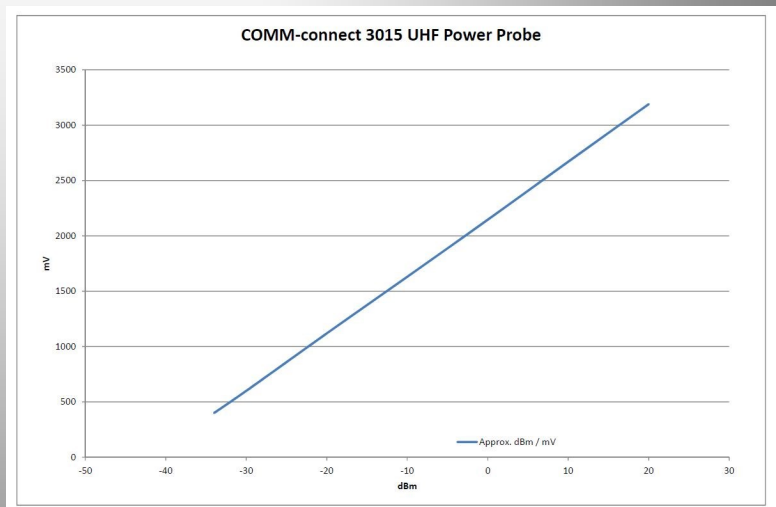

COMM-connect A/S reserves the right to change prices and specifications without prior notice